



WILDLAND MINI PUMPER

The Most Remarkable Mini Wildland Engine.



Scan to learn more.



WILDLAND MINI PUMPER

SPECIFICATIONS

TANK

- 500 IMP gallons water.
- 12 IMP gallons foam.
- High-strength polypropylene integrated to the body.

CHASSIS

- International CV 515
- Crew Cab, 4x4.
- Wheelbase: 175"
- Engine Duramax 6.6L Turbo- Diesel V8 / 350 hp @ 2700 RPM
- 700 lb. ft. torque @1600 RPM Transmission Allison 2750 EVS.
- Tire size: 255/70R22.5.
- Heavy Duty Front Bumper Brushguard
- Front Winch WARN 97740 16.5T
- Requires HD front bumper

PUMP

1) HALE RSD FLEX 1250GPM

- Split shaft
- Located at rear compartment
- Electric Priming System

AUXILIARY PUMP

- Darley 1 1/2 AG
 - -PTO driven pump
 - -Pump and roll

FOAM PROPORTIONING SYSTEM

- Trident FOAMATE.
- Around-The-Pump system.
- Class A.

HOSE REEL

- Hannay Reel Electric Hose Reel
- 100ft 1" booster hose
- Located in rear compartment

ROOF

- Hose storage according to NFPA
- Suction hose compartment.

LIGHTING

- Whelen emergency and priority lighting package as per NFPA.
- Scene lights: 2 per side.
- Transit lighting according to local regulations.

BODY AND COMPARTMENTS

- High Strength Polypropylene
- Compartment Storage: 2 per side, fully customizable.
- Aluminum roll-up doors. Enclosed rear pump

INTAKES/DISCHARGES

- High flow TIG welded stainless steel discharge and suction manifolds.
- Rear Discharges:
 - ·2 x 2 1/2"
 - ·1 x 1 1/2"
 - ·1 x 1" Hose reel
- External Suction: 6" w/Intake relief valve.
- Tank Intake: 4"
- Tank Fill:1x 2 1/2"
- Elkhart Brass Monitor.
- -Model: Sidewinder® EXM2 7100SDX2
- Nozzle: 6000-700E
- Cab controlled.
- Requires HD front bumper
- Front Discharges:
 - ·1 x 2 1/2" Monitor
- 1x 1 1/2" Swing out Valve.
- Requires HD front bumper.

OPTIONS


- Additional Fuel Tank 25 gal.
- Super Single 335/80R20 Wheel/Tires.




^{*}Specifications subject to change.

WILDLAND MINI PUMPER

DRAWINGS

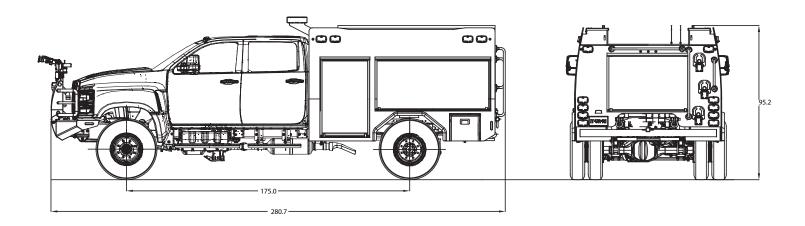

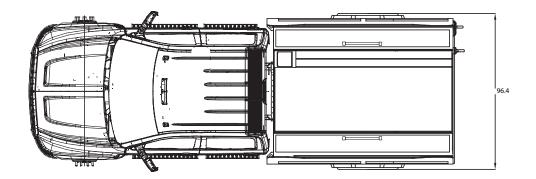

*Specifications subject to change.

